



10/51809  
Rec'd PCT/PTO 22 DEC 2004



10/51809/2002/104 #2



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport

South Wales  
NP10 8QQ  
REC'D 25 JUL 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *Andrew*

Dated 9 July 2003

**BEST AVAILABLE COPY**

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference P34111GB/NJMH

2. Patent application number  
(The Patent Office will fill in this part)

0214658.7

25 JUN 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

1) Royal College of Art, Kensington Gore, London, SW7 2EU  
- and -

2) Andrew Richard Southern c/o Royal College of Art,  
Kensington Gore, London, SW7 2EU

Patents ADP number (if you know it)

1) 55402073001

2) 8410789001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

CLASP

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Kilburn & Strode  
20 Red Lion Street  
London  
WC1R 4PJ

Patents ADP number (if you know it)

125001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

- Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

|             |       |
|-------------|-------|
| Description | 6 ✓   |
| Claim(s)    | 2 ✓   |
| Abstract    | 0 DMC |
| Drawing(s)  | 2+2   |

10. If you are also filing any of the following, state how many against each item.

|  |     |
|--|-----|
| Priority documents   | 0   |
| Translations of priority documents   | 0   |
| Statement of inventorship and right to grant of a patent (Patents Form 7/77) | 0   |
| Request for preliminary examination and search (Patents Form 9/77)           | 1 ✓ |
| Request for substantive examination (Patents Form 10/77)                     | 0   |
| Any other documents (please specify)   | 0   |

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 25/06/02

*N J M Hedley*

12. Name and daytime telephone number of person to contact in the United Kingdom

N J M Hedley  
Tel: 020 7539 4200

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.

CLASP

Technical Field

5 The present invention relates to a clasp for joining together two webs. Such devices are sometimes called "clips" and the words "clasp" and "clips" are used synonymously in this specification.

Background Art

10 Clasps for connecting together webs are well known and widely used for such diverse applications as securing the two ends of a belt together, closing rucksacks and other bags and sacks, fastening coats and waterproofs and so on. The almost universally accepted design nowadays for such clasp consists of two parts secured to respective webs, one of the parts (the male part) consists of a pair of prongs, each having an outwardly extending barbed tooth and the other part (the female part) has a channel  
15 into which the prongs can be pushed. The width of the channel is smaller than the distance between the outsides of the prongs and so, as the male part is pushed into the channel, the prongs are flexed inwardly by the outer walls of the channel. The walls includes a pair of openings into which the barbed teeth can snap when the male part has been pushed sufficiently far into the channel. The engagement of the barbs in the  
20 channel wall openings retains the two parts together and so connects the webs attached to the two parts.

25 A guide prong is provided between the two barbed prongs in the male part of the clasp; the guide prong engages ridges in the channel of the female member to ensure that the male member travels axially along the channel.

30 In order to undo the clasp, the prongs are pinched to move towards each other thereby releasing the barbs from the openings and allowing the male part to be withdrawn from the female part.

Because the openings are exposed, it is possible for a user to catch his/her fingers between the barb and the opening, which can be painful.

The present invention provides an alternative design of clasp that has several advantages over the known design.

5     **Disclosure of Invention**

According to the present invention, there is provided a clasp that comprises a first member and a second member that can be joined together to fasten the clasp and that can be separated from each other to release the clasp, wherein the first and the second members are identical to each other, and each of the first and second members  
10 includes:

    a resilient latch with an outwardly facing barb;  
    a channel for receiving the barb of the other part and  
    a catch located in the channel for engagement with the barb of the other part  
    when the two parts are pushed together in an axial direction

15 and wherein the arrangement of the two barbs and the two catches of the clasp is such that the two barbs engage the respective catches as the parts are pushed together so as to keep the parts together and fasten the clasp and wherein the latches of the two parts can be moved to release the barbs from engagement with the respective catches to release the clasp.

20 As used in the present specification, the expression "axial direction" is intended to denote the direction in which a part is moved to fasten the clasp. The term "transverse direction" is intended to denote a direction generally perpendicular to the axial direction.

25 Because the two parts of the clasp are identical, only one mould is required to make the clasp and only one stock number is necessary. It also makes packaging easier as compared to the prior art since where there is a need to ensure that one male and one female part are provided together. In addition, it makes the handling of the parts easier  
30 as compared to the prior art where it is sometimes necessary to ensure that the male and female parts are attached to specific webs.

On each part, the barb and the catch are preferably not arranged side-by-side in the transverse direction but rather the catch is located axially behind the barb so that the shaft of the latch can be engaged by the user to press it inwardly to release the barb from the catch and so release the clasp.

5

Each part of the clasp preferably includes a housing containing the channel leading to the catch and extending transversely over the width of each part between the latch and the channel, the housing of each part comprising an interface surface that abuts the corresponding surface of the other part when the clasp is fastened, which interface surface preferably extends diagonally with respect to the axial direction such that the surface in the region of the catch is located axially behind the surface in the region of the barb.

10

The latch preferably forms a wall of the housing of each of the parts, the latch being moveable with respect to the rest of the housing to release the barb from the catch and open the clasp.

15

#### **Brief Description of Drawings**

There will now be described, by way of example only, an embodiment of the clasp according to the present invention by reference to the accompanying drawings in which:

20

Figure 1 is a perspective view of a clasp in accordance with the present invention;

Figure 2 is a base view of the clasp of Figure 1; and

25

Figure 3 shows the manner in which the clasp of Figures 1 and 2 is fastened.

#### **Best Mode of Carrying out the Invention**

Referring initially to Figure 3, the clasp includes two identical parts 10 and 12 that are joined together to form a clasp. As will be described in more detail below, the clasp can be fastened by pushing the two parts 10,12 together in an axial direction indicated by arrows A and B for the two parts 10 and 12. The clasp can be opened by pressing on buttons 31 (only one visible in Figure 3).

30

The two parts 10,12 each have a housing 16 formed by a rounded upper surface 18 and a flat bottom surface (shown in Figure 2). The two parts 10,12 abut each other along a diagonal interface surface 20.

5

At the rear of the housing 16, each part has a pair of forked arms 22 and a pair of bars 24 extend between these arms to form a ladder fastening for securing the clasp to webs that are to be joined. The webs are threaded around the bars in a known manner. Alternatively, the webs can be stitched onto the bars 24.

10

Referring now to Figures 1 and 2, these Figures show one of the parts 10 in more detail but it will be appreciated that since the two parts 10,12 are identical, the description applies equally to the second part 12.

15

The housing 16 and the interface surfaces 20 are clearly visible in Figure 2. The buttons 31 form part of a latch 14, at one end of which there is a barb 26 on the outer side of the latch; at its other end 28, the latch is anchored to the housing thus forming a cantilever that can flex inwardly by pushing the button 31 of the latch 14 inwardly in the direction of arrow C. Ridges 30 are provided on the outside of the button 31 indicating the place at which the latch should be pushed to open the clasp. The button 31 is wider than the shank 29 of the latch (i.e. the part of the latch carrying the barb 26). The distance that the latch 14 can travel in the direction of arrow C is limited by the engagement of the button 31 with a stop surface 33.

20

25

The housing 16 is hollow and has an internal cavity 32. As shown, the latch 14 is located along one side of the housing and indeed forms a side wall of the housing. In the opposite side wall, there is a catch 35 (not visible but it is shown in broken lines in Figure 1 and its position is indicated by arrow D). The catch 35 is moulded in the housing wall within the internal cavity 32 and has a cam surface 38 and an engagement surface 36 extending transverse to the axial direction A.

30

The barb 26 has an under-surface 34. When the clasp is to be fastened, the two parts 10,12 are pushed towards each other in the direction of arrows A and B (Figure 3).

The latch 14 of one part is therefore located adjacent to the catch 35 on the other part so that as the parts 10,12 are pushed together, a sloping surface 40 of the barb 26 engages the cam surface 38 of the catch, causing the latch to flex inwardly until the barb has passed the catch, whereupon it moves outwards because of the resilience of the latch causing the underside of the 34 of the barb 26 to engage with the engagement surface 36 of the catch, preventing the parts 10,12 being pulled apart. It is of course evident that because each part 10,12 has both a latch 14 and a catch 35, the clasp is closed at each of its sides with the above arrangement.

In order to release the clasp, the latches 14 on the opposed sides of the clasp should be squeezed to move the latches in the direction of arrow C to a position in which the barbs 26 lie inwardly of the corresponding catches 35 and so the two parts 10,12 can be separated. Because the buttons 31 of the two parts 10,12 are located opposite each other, the act of pressing them does not cause the clasp to slew round when pressed. The clasp has depth to it, which makes it stable when pressing the release buttons 31.

Very little physical strength is needed to separate the parts 10,12 of the clasp, making it available to children, the elderly and the infirm.

The flat base 44 allows the clasp to lie flat against a surface if the webs are tensioned, e.g. if the webs are straps on a suitcase, the flat base 44 lies against the suitcase and does not press into the case. The flat surface also allows the manufacturer to mark the product, either with its own name or with advertising.

The D-shape cross section of the housing 16 dictates to users how the two parts 10,12 should be connected together since it is apparent that the flat base of the two parts 10,12 should align with each other.

The shape of the diagonal interface surface 20 is important. If the parts 10,12 are not properly aligned, the engagement of the surfaces 20 of the two parts 10,12 with each



other pushes the parts 10,12 into their correct alignment for fastening. There is thus no need for a central guide prong to help align and locate the two parts 10,12 as is the case with the prior art. In addition, as the clasp has a diagonal interface surface, the pressing on buttons 31 will tend to cause the housing parts 18 to slide along the diagonal interface as soon as the barbs 26 are released causing the clasp to fly apart, which means that opening of the claps is simple.

Since the catch 35 is not accessible from the outside, users cannot pinch their fingers when releasing the clasp.

The clasp can be made with one 3-pan set of injection moulds: upper half, lower half and centre core. The catch 36 and much of the spacing around the button 31 are moulded from the bottom half of the mould. The clasp can be moulded in any suitable plastic, e.g. nylon, and in any colour.

**CLAIMS**

1. A clasp that comprises a first member and a second member that can be joined together to fasten the clasp and that can be separated from each other to release the clasp, wherein the first and the second members are identical to each other, and each of the first and second members includes:

a resilient latch with an outwardly facing barb;

a channel for receiving the barb of the other part and

a catch located in the channel for engagement with the barb of the

other part when the two parts are pushed together in an axial direction

and wherein the arrangement of the barb and the catch of each part is such

that the barb of each part engages the catch of the other part as the two parts

are pushed together to keep the parts together and the latches of the two parts

can be moved to release each barb from the catch of the other part.

2. A clasp as claimed in claim 1, wherein, on each part, the barb and the catch are arranged such that the catch is located axially behind the barb.

3. A clasp as claimed in claim 1 or claim 2, wherein the latch and the catch are located on opposite sides of each part.

4. A clasp as claimed in any one of claims 1 to 3, wherein each part of the clasp includes a housing providing the channel leading to the catch and extending transversely over the width of each part between the latch and the catch, the housing of each part comprising an interface surface that abuts the corresponding surface of the other part when the clasp is fastened,

5. A clasp as claimed in claim 4, wherein the interface surface extends diagonally with respect to the axial direction such that the surface in the region of the catch is located axially behind the surface in the region of the barb.

6. A clasp as claimed in any one of claims 1 to 5, wherein the latch forms a wall of the housing of each of the parts, the latch being moveable with respect to the rest of the housing to release the barb from the catch and open the clasp.

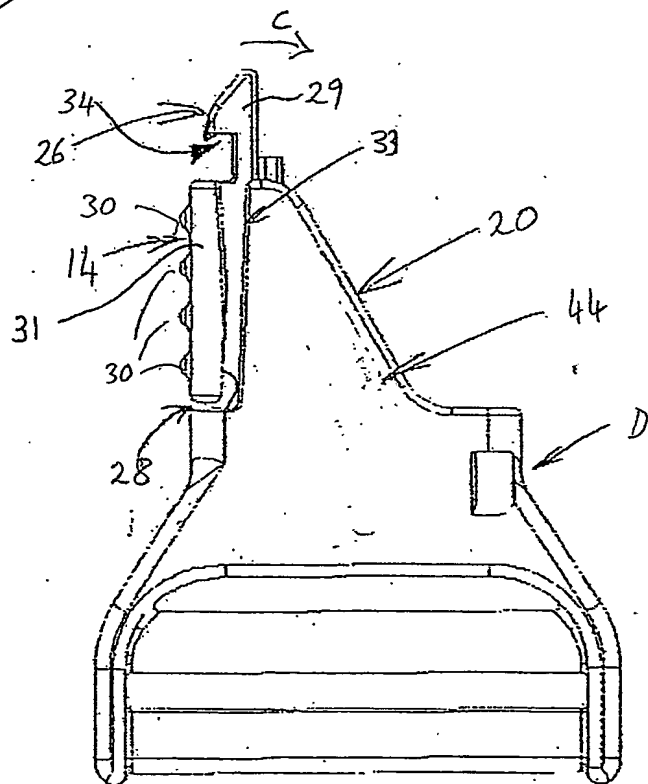
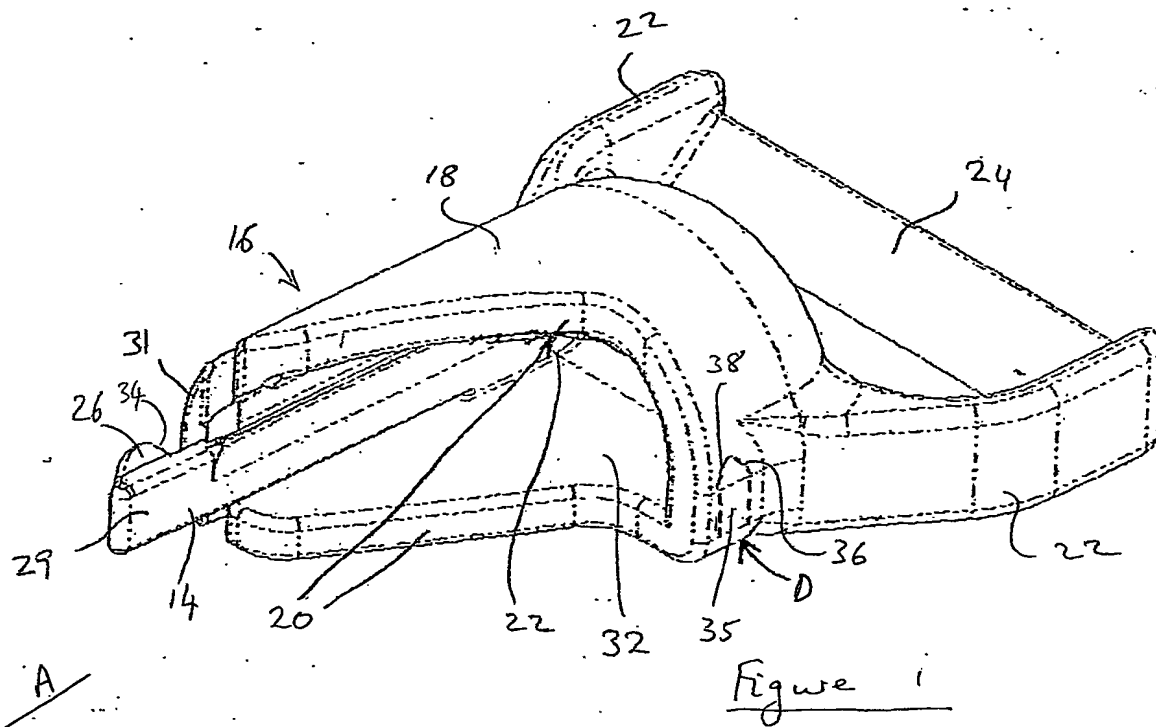


Figure 2

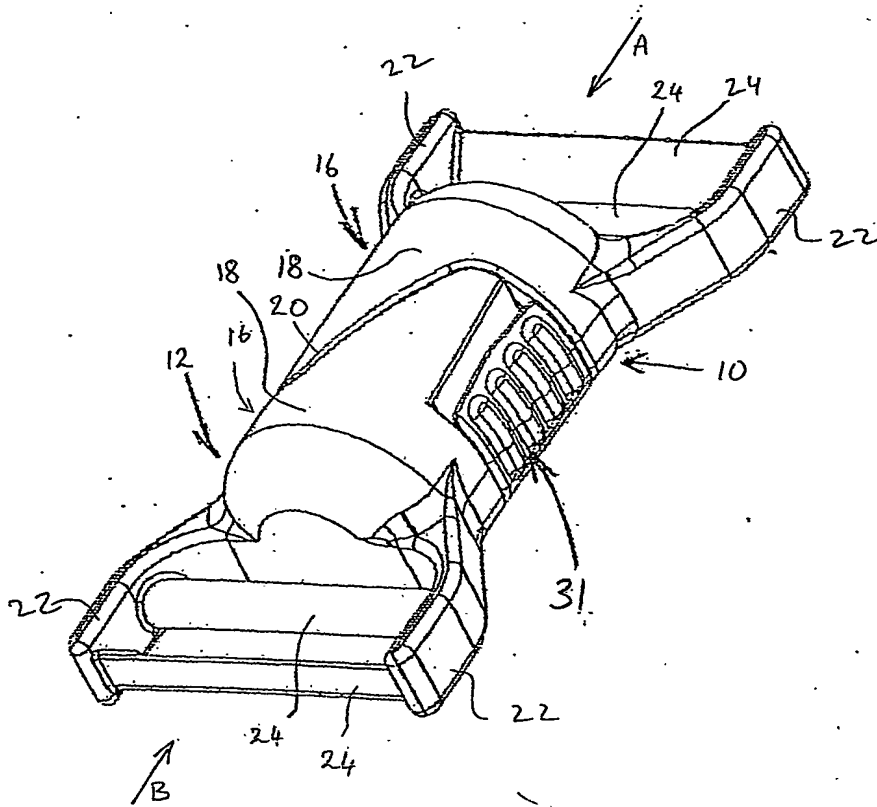


Figure 3

THE PATENT OFFICE  
09 JUL 2003  
Re: [illegible] [illegible]  
[illegible] [illegible]